


**Fräsfutter BFF für Spannzangen DIN ISO 10897 Muttern für Spannzangen Din ISO10897
BFF16 BFF25 BFF32 BFF40 BFF50**


FRÄSFUTTER BFF FÜR SPANNZANGEN DIN ISO 10897

mit Steilkegelschaft DIN 2080

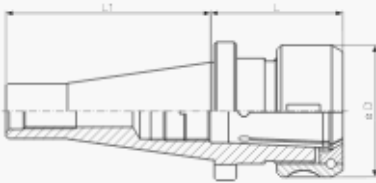


Art.-Nr.	Spannzange	L	L1	Ø	Kegel	Spannbereich
BFF 16/S K 30	410/415 E	53	68	43	S K 30	2 - 16
BFF 25/S K 30	444/462 E	53	68	60	S K 30	2 - 25
BFF 25/S K 40	444/462 E	64	93	60	S K 40	2 - 25
BFF 32/S K 40	450/467 E	69	93	72	S K 40	4 - 32
BFF 32/S K 50	450/467 E	71	127	72	S K 50	4 - 32
BFF 40/S K 50	453/468 E	90	127	85	S K 50	6 - 40

mit Steilkegelschaft DIN 69871 Form A

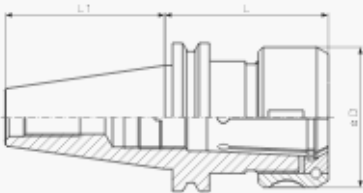


Art.-Nr.	Spannzange	L	L1	Ø	Kegel	Spannbereich
BFF 16/S K 30 - 60	410/415 E	60	46	43	S K 30	2 - 16
BFF 16/S K 40 - 70	410/415 E	70	66	43	S K 40	2 - 16
BFF 16/S K 50 - 70	410/415 E	70	102	43	S K 40	2 - 16
BFF 25/S K 30 - 80	444/462 E	80	46	60	S K 30	2 - 25
BFF 25/S K 40 - 70	444/462 E	70	66	60	S K 40	2 - 25
BFF 25/S K 50 - 70	444/462 E	70	102	60	S K 50	2 - 25
BFF 32/S K 40 - 80	450/467 E	80	66	72	S K 40	4 - 32
BFF 32/S K 50 - 73	450/467 E	73	102	72	S K 50	4 - 32
BFF 40/S K 50 - 90	453/468 E	90	102	85	S K 50	6 - 40
BFF 50/S K 50 - 100	466 E	100	102	100	S K 50	8 - 50

mit Morsekegel

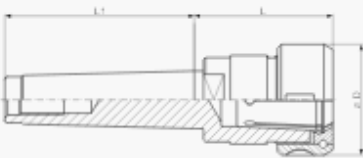

Art.-Nr.	Spannzange	L	L1	Ø	Kegel	Spannbereich
BFF 16/MK 2	410/415 E	61	64	43	MK 2	2 - 16
BFF 25/MK 3	444/462 E	64	80	60	MK 3	2 - 25
BFF 25/MK 4	444/462 E	64	103	60	MK 4	2 - 25

mit zylindrischem Schaft



Art.-Nr.	Spannzange	L	L1	Ø	Kegel	Spannbereich
BFF6/16	400 E	19	140	18	16	1 - 6
BFF6/20	400 E	19	140	18	20	1 - 6
BFF10/20	404 E	19	145	30	20	1 - 10
BFF10/25	404 E	19	145	30	25	1 - 10
BFF16/25	410/415 E	36	145	43	25	2 - 16
BFF16/30	410/415 E	36	150	43	30	2 - 16