


Fräsfutter für Spannzangen DIN ISO 15488
FER 25 FER32 FER40 FER50 FER16


FRÄSFUTTER FER FÜR SPANNZANGEN DIN ISO 15488

mit Steilkegelschaft DIN 2080




Art.-Nr.	Spannzange	L	L1	Ø	Kegel	Spannbereich
FER 25/S K 30	430 E	43	68	42	S K 30	2 - 16
FER 32/S K 30	470 E	50	68	50	S K 30	4 - 20
FER 32/S K 40	470 E	50	93	50	S K 40	4 - 20
FER 40/S K 40	472 E	55	93	63	S K 40	4 - 26
FER 40/S K 50	472 E	58	127	63	S K 50	4 - 26
FER 50/S K 40	477 E	78	93	78	S K 40	12 - 34
FER 50/S K 50	477 E	64	127	78	S K 40	12 - 34

mit Steilkegelschaft DIN 69871 Form A



Art.-Nr.	Spannzange	L	L1	Ø	Kegel	Spannbereich
FER 16/S K 30 - 100	426 E	100	48	32	S K 30	1 - 10
FER 16/S K 30 - 70	426 E	70	48	32	S K 30	1 - 10
FER 16/S K 40 - 100	426 E	100	68	32	S K 40	1 - 10
FER 16/S K 40 - 160	426 E	150	68	32	S K 40	1 - 10
FER 16/S K 40 - 70	426 E	70	68	32	S K 40	1 - 10
FER 16/S K 50 - 100	426 E	100	102	32	S K 50	1 - 10
FER 16/S K 50 - 160	426 E	150	102	32	S K 50	1 - 10
FER 25/S K 30 - 60	430 E	60	48	42	S K 30	2 - 16
FER 25/S K 40 - 100	430 E	100	68	42	S K 40	2 - 16
FER 32/S K 30 - 65	470 E	65	48	50	S K 30	4 - 20
FER 32/S K 40 - 160	470 E	150	68	50	S K 40	4 - 20
FER 32/S K 40 - 70	470 E	70	68	50	S K 40	4 - 20
FER 32/S K 50 - 100	470 E	100	102	50	S K 50	4 - 20
FER 32/S K 50 - 160	470 E	160	102	50	S K 50	4 - 20
FER 40/S K 40 - 160	472 E	150	68	63	S K 40	4 - 26
FER 40/S K 40 - 80	472 E	80	68	63	S K 40	4 - 26
FER 40/S K 50 - 100	472 E	100	102	63	S K 50	4 - 26
FER 40/S K 50 - 160	472 E	160	102	78	S K 50	4 - 26
FER 50/S K 50 - 100	477 E	100	102	78	S K 50	12 - 32

mit Morsekegel

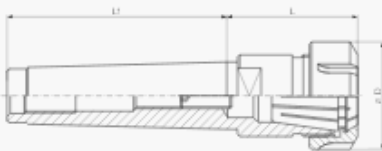

Art.-Nr.	Spannzange	L	L1	Ø	Kegel	Spannbereich
FER 16/MK 1	426 E	41,0	52	32	MK 1	1 - 10
FER 20/MK 2	428 E	48,5	63	35	MK 2	2 - 13
FER 25/MK 2	430 E	52,0	63	42	MK 2	2 - 16
FER 32/MK 3	470 E	70,0	80	50	MK 3	4 - 20
FER 32/MK 4	470 E	61,5	101	50	MK 4	4 - 20
FER 40/MK 4	472 E	61,5	101	63	MK 4	4 - 26